


Three phase inverters 3 to 10 kW

# ASW LT-G2 Pro Series

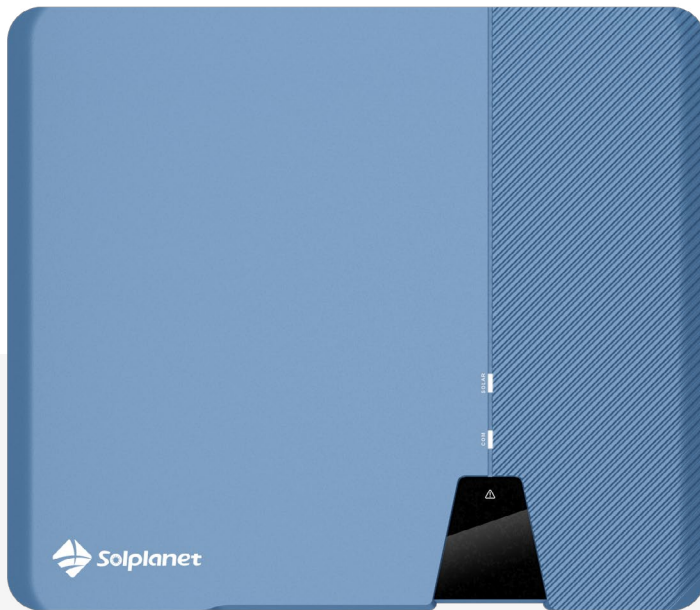

Models:

- ASW3K-LT-G2 Pro
- ASW4K-LT-G2 Pro
- ASW5K-LT-G2 Pro
- ASW6K-LT-G2 Pro
- ASW8K-LT-G2 Pro
- ASW10K-LT-G2 Pro



## Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



## Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



## User-friendly

- User friendly app interface
- Max.20 A input current, ideal for bifacial and large area PV modules
- Wide MPP voltage range 150V-1000V
- ShadeSol shadow management

# Technical Datasheet

ASW 3K-LT-G2 Pro ASW 4K-LT-G2 Pro ASW 5K-LT-G2 Pro ASW 6K-LT-G2 Pro ASW 8K-LT-G2 Pro ASW 10K-LT-G2 Pro

Input (DC)	Max. PV array power	4500 Wp STC	6000 Wp STC	7500 Wp STC	9000 Wp STC	12000 WpSTC	15000 Wp STC
	Max. input voltage	1100 V					
	MPP voltage range / rated input voltage	150 V to 1000 V / 630 V					
	Min. input voltage	125 V					
	Initial. feed-in voltage	180 V					
	Max. operating input current	16 A / 16 A				20 A / 16 A	
	Max. short circuit current	25 A / 25 A				30 A / 25 A	
	No. of independent MPPT inputs / strings per MPPT input	2 / A :1 ; B : 1					
Output (AC)	Rated active power	3000 W	4000 W	5000 W	6000 W	8000 W	10000 W
	Rated apparent power	3000 VA	4000 VA	5000 VA	6000 VA	8000 VA	10000 VA
	Max. apparent power	3000 VA	4000 VA	5000 VA	6000 VA	8000 VA	10000 VA
	AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V					
	AC voltage range	160 V to 300 V					
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz					
	Max. output current	4.8A	6.4 A	8.0 A	9.6 A	12.8 A	16 A
	Adjustable power factor range	0.8 leading to 0.8 lagging					
	Feed-in phases	3 / 3-N-PE					
	Harmonic distortion (THD) at rated output	< 3%					
Efficiency & Protection	Max. efficiency / European efficiency	98.3 % / 97.9 %				98.6% / 98.2 %	
	DC Switch	●					
	Ground fault monitoring / grid monitoring	● / ●					
	DC reverse polarity protection / AC short circuit protection	● / ●					
	All-pole-sensitive residual-current monitoring unit	●					
	Arc fault circuit interrupter (AFCI)	○					
	Anti-islanding protection	●					
	Surge protection	● / Type II					
	Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC : III ; DC : II					
General data	Dimensions (W / H / D)	503 / 435 / 183 mm					
	Weight	16 kg					
	Operating temperature range	-25°C ... +60°C					
	Self-consumption (at night)	< 1 W					
	Topology	Non-isolated					
	Cooling concept	Natural Convection					
	Degree of protection (according to IEC 60529)	IP66					
	Climatic category (according to IEC 60721-3-4)	4K4H					
	Max. permissible value for relative humidity (non-condensing)	100 %					
	Max. operating altitude	3000 m					
Features	DC connection	Plug-in connector					
	AC connection	Plug-in connector					
	Mounting type	Wall-mount bracket					
	LED indicators (Status / Fault / Communication)	●					
	24/7 monitoring	●					
	Communication interface <sup>1</sup>	● / ● / ● / ○ (RS485 / Wi-Fi / LAN / 4G)					
	Country of Manufacture	China					
	Certificates and approvals (more available on request)	CE, EN50549, G98/99, VDE-AR-N4105, AS/NZS 4777, C10/C11, VFR 2014 & UTE C15, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, NB/T 32004					

● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters


Data at nominal conditions. All information is subject to change.

Version: Sep 2024



Three phase inverters 12 to 20 kW

# ASW LT-G2 Pro Series

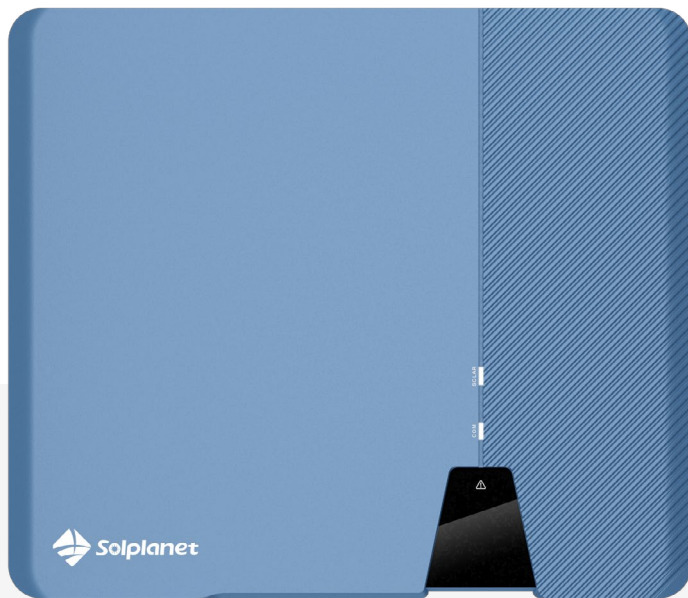

Models:

ASW12K-LT-G2 Pro  
ASW13K-LT-G2 Pro  
ASW15K-LT-G2 Pro  
ASW17K-LT-G2 Pro  
ASW20K-LT-G2 Pro



## Easy-to-install

- Quick & easy-to-install with basic tools
- Quick setup and commissioning with Solplanet apps
- Compact wall mount design



## Reliable

- International quality standards
- 150 % PV array oversizing for higher yields
- IP66 rated design for outdoor use



## User-friendly

- User friendly app interface
- 20 A input current, ideal for bifacial and large area PV modules
- Wide MPP voltage range 150V-1000V
- ShadeSol shadow management

# Technical Datasheet

	ASW 12K-LT-G2 Pro	ASW 13K-LT-G2 Pro	ASW 15K-LT-G2 Pro	ASW 17K-LT-G2 Pro	ASW 20K-LT-G2 Pro	
Input (DC)	Max. PV array power	18000 Wp STC	19500Wp STC	22500 Wp STC	25500 Wp STC	30000 Wp STC
	Max. input voltage	1100 V				
	MPP voltage range / rated input voltage	150 V to 1000 V / 630 V				
	Min. input voltage	125 V				
	Initial. feed-in voltage	180 V				
	Max. operating input current	32 A / 20 A	32 A / 20 A	32 A / 20 A	32 A / 32 A	32 A / 32 A
	Max. short circuit current	48 A / 30 A	48 A / 30A	48 A / 30 A	48 A / 48 A	48 A / 48 A
No. of independent MPPT inputs / strings per MPPT input	2 / A:2;B:1	2 / A:2;B:1	2/A:2;B:1	2 / A:2;B:2	2 / A:2;B:2	
Output (AC)	Rated active power	12000 W	13000 W	15000 W	17000 W	20000 W
	Rated apparent power	12000 VA	13000 VA	15000 VA	17000 VA	20000 VA
	Max. apparent power	12000 VA	13000 VA	15000 VA	17000 VA	20000 VA
	AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V				
	AC voltage range	160 V to 300 V				
	AC grid frequency / range	50 Hz / 45 Hz to 55 Hz 60 Hz / 55 Hz to 65 Hz				
	Max. output current	19.1 A	20.7 A	24 A	27.1 A	31.9 A
	Adjustable power factor range	0.8 leading to 0.8 lagging				
	Feed-in phases	3 / 3-N-PE				
	Harmonic distortion (THD) at rated output	< 3 %				
	Efficiency & Protection	Max. efficiency / European efficiency	98.6% / 98.2 %			
DC Switch		●				
Ground fault monitoring / grid monitoring		● / ●				
DC reverse polarity protection / AC short circuit protection		● / ●				
All-pole-sensitive residual-current monitoring unit		●				
Arc fault circuit interrupter (AFCI)		○				
Anti-Islanding protection		●				
Surge protection		● / Type II				
Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)		I/AC: III; DC :II				
General data	Dimensions (W / H / D)	503 / 435 / 183 mm				
	Weight	17 kg				
	Operating temperature range	-25°C ... +60°C				
	Self-consumption (at night)	< 1 W				
	Topology	Non-isolated				
	Cooling concept	Active cooling				
	Degree of protection (according to IEC 60529)	IP66				
	Climatic category (according to IEC 60721-3-4)	4K4H				
	Max. permissible value for relative humidity (non-condensing)	100%				
	Max. operating altitude	3000 m				
	Features	DC connection	Plug-in connector			
AC connection		Plug-in connector				
Mounting type		Wall-mount bracket				
LED indicators (Status / Fault / Communication)		●				
24/7 monitoring		●				
Communication interface <sup>1)</sup>		●/●/●/○ (RS485 /Wi-Fi/ LAN /4G)				
Country of manufacture		China				
Certificates and approvals (more available on request)		CE, EN50549, IEC62109, IEC62116, IEC61727, IEC61683, IEC60068, IEC61000, AS/NZS4777, C10/C11				

● Standard features / ○ optional features / – not available

1- Zero export installations supported with 2-pin RS485 for connection to approved smart meters

Data at nominal conditions. All information is subject to change.

Version: Sep 2024.

